


Think GAIA

For Life and the Earth

SANYO

Full HD Vandal-Resistant Dome Camera Series

VDC-HD3100P
VDC-HD3300P
VDC-HD3500P

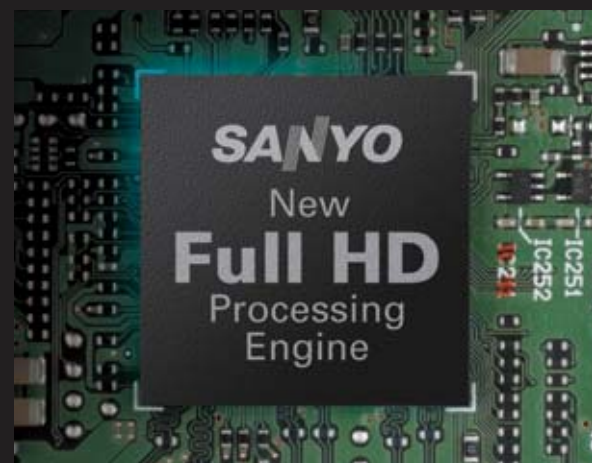

SANYO, the first choice for Full HD

- Built-in megapixel-rated Vari-Focal Lens (3 - 9mm)
- IP66-rated Vandal-Resistant Discreet Low-Profile Design
- 1080p Full HD, 25 ips Full Framerate with H.264
- 4-megapixel (2288 x 1712) resolution with MJPEG
- Exclusive Xacti HD-Pro Engine (HD3500P) and Optimum IP-Pro Engine
- Quad-Stream (HD3500P), Dual-Stream (HD3100P/HD3300P)
- Focus Assist Drive
- Video Analytics *1
- Edge Recording on SD Memory Card *2
- Bidirectional Audio *1
- Universal Power Input PoE, 24VAC and 12VDC

*1 Only for VDC-HD3500P

*2 Only for alarm/Back-up REC. VDC-HD3500P (The use Sanyo-recommended SD card)

FULL HD
1920 X 1080



VDC-HD3100P
Dual-Stream Color
Vandal-Resistant Dome

VDC-HD3300P
Dual-Stream Day/Night
Vandal-Resistant Dome

DAY NIGHT

VDC-HD3500P
Quad-Stream Day/Night
Vandal-Resistant Dome

DAY NIGHT

Technical Specifications

Camera

Model No.	VDC-HD3500P	VDC-HD3300P	VDC-HD3100P
Image sensor	1/3" Progressive Scan CMOS		
Number of pixels	Effective 16:9 1920 (H) x 1080 (V) 4:3 2288(H) x 1712(V)		
Minimum illumination (approx.)	Color 1.0 lux (F1.2, GAIN HIGH), B/W 0.1 lux (F1.2, GAIN HIGH) Color 1.0 lux (F1.2, GAIN HIGH)		
Video S/N ratio	More than 50 dB (AGC off)		
Lens	Built-in vari-focal lens f=3 to 9mm, F1.2 to 2.1		
Electronic focus adjustment	With focus assist		
Backlight compensation	Multi/Center/Face/Off, Mask settings possible	Multi/Center/Off, Mask settings possible	
White balance	ATW/AWC/MWB/Outdoor/Indoor/Fluorescent Adjustable R and B signals in MWB mode		
AGC	Normal/Middle/High/Off Adjustable, gain control in Off mode		
Electronic shutter	1/25, 1/50, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000 Long shutter : x1, x2, x4, x8, x16, x32		
Auto iris control	DC type		
Gamma	0.45/1/Mode1/Mode2		
Aperture compensation	On/Off		
Day/Night	True Day/Night	—	
DNR	3D		
Title	16 Characters		
Motion detection	Yes, Video analytics	Yes	
Face detection	Yes	—	
Privacy mask	On/Off		

Network

Image compression	MJPEG / H.264		
Resolution	H.264	<16:9> 1920x1080 / 1280x720 / 640x360 / 320x180 <4:3> 1600x1200 / 1280x960 / 1024 x 768 / 640x480 / 320x240	
	MJPEG	<16:9> 1920x1080 / 1280x720 / 1024x576 / 640x360 <4:3> 2288x1712 / 1600x1200 / 1280x960 / 1024x768 / 800x600 / 640x480 / 320x240	
Picture quality	Quality: (BASIC, NORMAL, ENHANCED, FINE, SUPER FINE) Bitrate: Chageable		
Frame rate	Max. 25 ips (1920x1080)		
Streaming number	4	2	
Video streaming	Multi stream H.264 and MJPEG (Max 1920x1080 25ips)		
Audio compression method	G.711, Bidirectional (Full duplex)	—	
Protocol	TCP/IP, UDP, HTTP, HTTPS, SMTP, NTP, DHCP, FTP, DDNS, RTP, RTSP		
Simultaneous access capacity	Max. 20		
Security	BASIC authentication (ID/password), SSL supported (Only JPEG), IP filtering		

Interface


Monitor output	Composite out (for adjustment only)		
SD memory card slot	1(SDHC)	—	
Network port	10BASE-T/100BASE-TX (RJ45 connector)		
Alarm input/output	2/2		
Audio input/output	Mic in/Line out (3.5 Φmini jack)	—	

General

Environmental conditions	Operating	Temperature: -10 to +50°C Humidity: within 90% RH	
	Storage	Temperature: -20 to +70°C Humidity: within 70% RH	
Power supply	24V AC ±10%, 50 Hz/ 12 - 15V DC, PoE (IEEE802.3af)		
Power consumption (approx.)	6.8w (with Heater 20w)	4.6w (with Heater 18w)	
Dimensions (approx.) (Dia. x H)	Φ146 x 94mm		
Weight (approx.)	800g	770g	

*Specifications, design and availability are subject to change without notice.

Dimensions

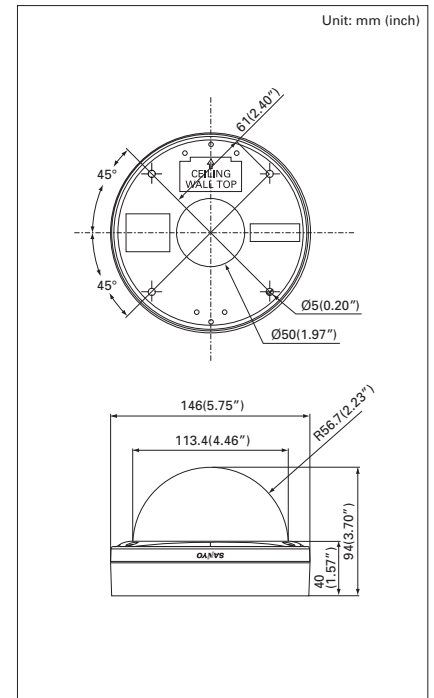

Caution: Please consult the instruction manual to ensure safe and proper operation of the product.



Digital System Company of SANYO Electric Co., Ltd. obtained Quality Management System ISO9001 and Environmental Management System ISO14001 certifications.

Distributed by:



SANYO Electric Co., Ltd.
 Digital System Company
<http://www.sanyosecurity.com>